




RSIC-SI-CRC SOUND ISOLATION CLIP

RSIC-SI-CRC

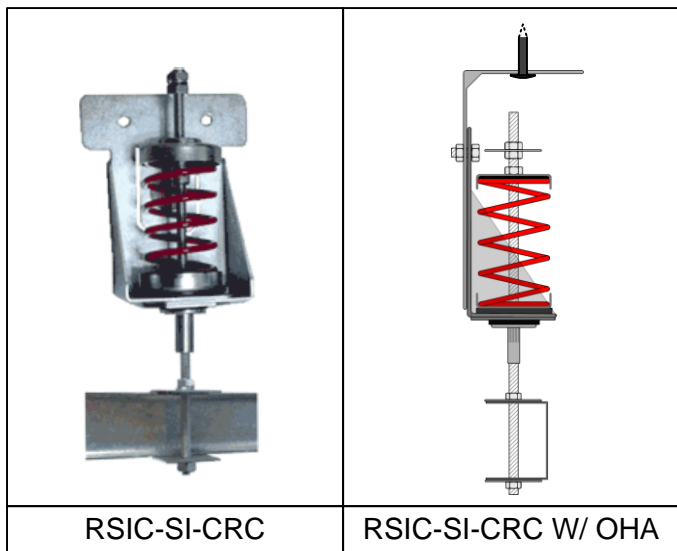

RSIC-SI-CRC

RSIC-SI-CRC W/ OHA




The **RSIC-SI-CRC** is designed to isolate the ceiling consisting of 1.5" x 16 Ga cold rolled channel and furring channel (25 or 20 Ga). The RSIC-SI-CRC clip is available in 10 lb, 20 lb, 40 lb, 80 lb, 120 lb and 160 lb versions. The 80 lb, 120 lb and 160 lb isolators allow for spacing at 48" x 48" oc supporting 2, 3 or 4 layers of 5/8" gypsum board. The lighter weight springs (5 lb ~ 40 lb) may be used for single layer ceilings, edge or corner isolation. The RSIC-SI-CRC clips unique universal mounting system allows it to be mounted to wood and steel framed systems. The RSIC-SI-CRC isolator can also be mounted to concrete with the addition of the RSIC-SI Overhead adapter.

Wood
Steel
Metal Deck

Steel
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

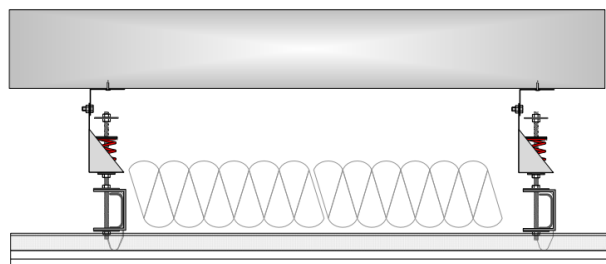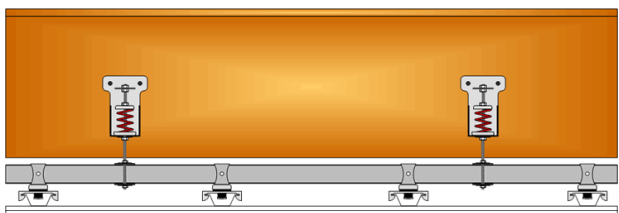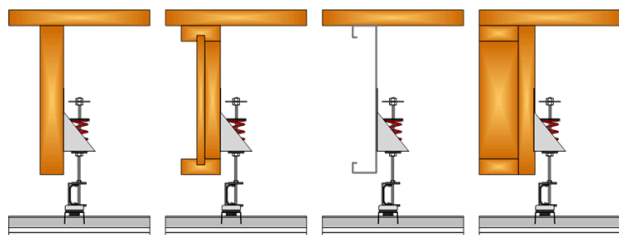

RSIC-SI-CRC specifications:

Acoustical design load:	5 lbs to 160 lbs
Total deflection	1 inch
Double deflection	YES (+/- 1/2")
Pre-Calibrated	YES
Pre-Assembled	YES
Adjustable	YES
Cavity min	1 inch (wood)
Cavity Max	9 inches
Adjustment limit	6 inches
Use on Ceilings	YES
Use on walls	NO
New Construction	YES
Retro Fit	YES