




RSIC-SI-CRC X2 Low Profile



The RSIC-SI-CRC X2 Low Profile Spring Isolator is designed for use in a ceiling under Concrete, Steel or Wood Floor Ceiling systems. The RSIC-SI-CRC X2 Low Profile isolator is available in 5 lb, 10 lb, 20 lb, 40 lb, 80 lb, 120 lb, and 160 lb spring rates. The Spring is fully assembled and preloaded. The RSIC-SI-CRC X2 Low Profile is adjustable starting with a 3" drop. To increase the cavity depth, add all thread and a coupling nut to extend the RSIC-SI-CRC X2 Low Profile further away from the floor system.

RSIC-SI-CRC X2, the Low Cost, High Performance, Noise control Solution

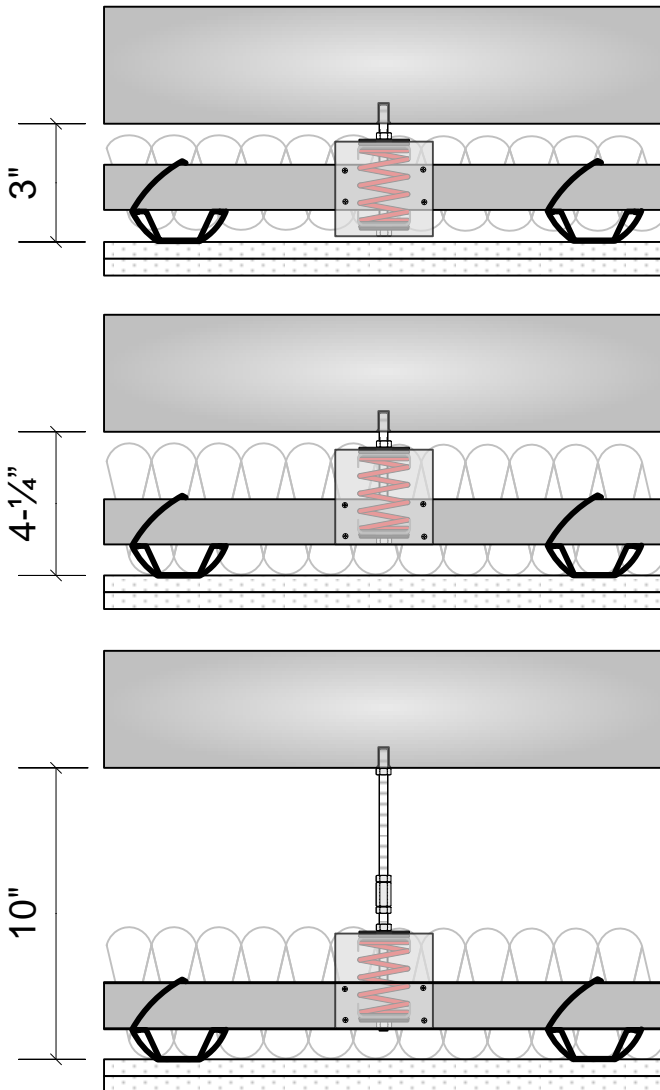

Concrete
Wood
Steel
Apartment
Retail
Conference Rooms

Condo
Commercial
Recording Studio
Home Theater
Commercial theater

RSIC-SI-CRC X2 specifications:	
Acoustical design load:	5 lbs to 160 lbs
Total deflection	1"
Double deflection	Yes (1/2")
Adjustable	Yes
Cavity min	3"
Cavity Max	Variable
Adjustment limit	Extension Length
Use on Ceilings	Yes
Use on walls	No
New Construction	Yes
Retro Fit	Yes
Ships Preassembled	Yes