


## RSIC-SI-CRCX2-LP

### RSIC Spring Isolator Cold Rolled Channel x2 Low Profile

Image below shows assembly with 3-1/4" free height spring preloaded 1/2" and set at 2-3/4"

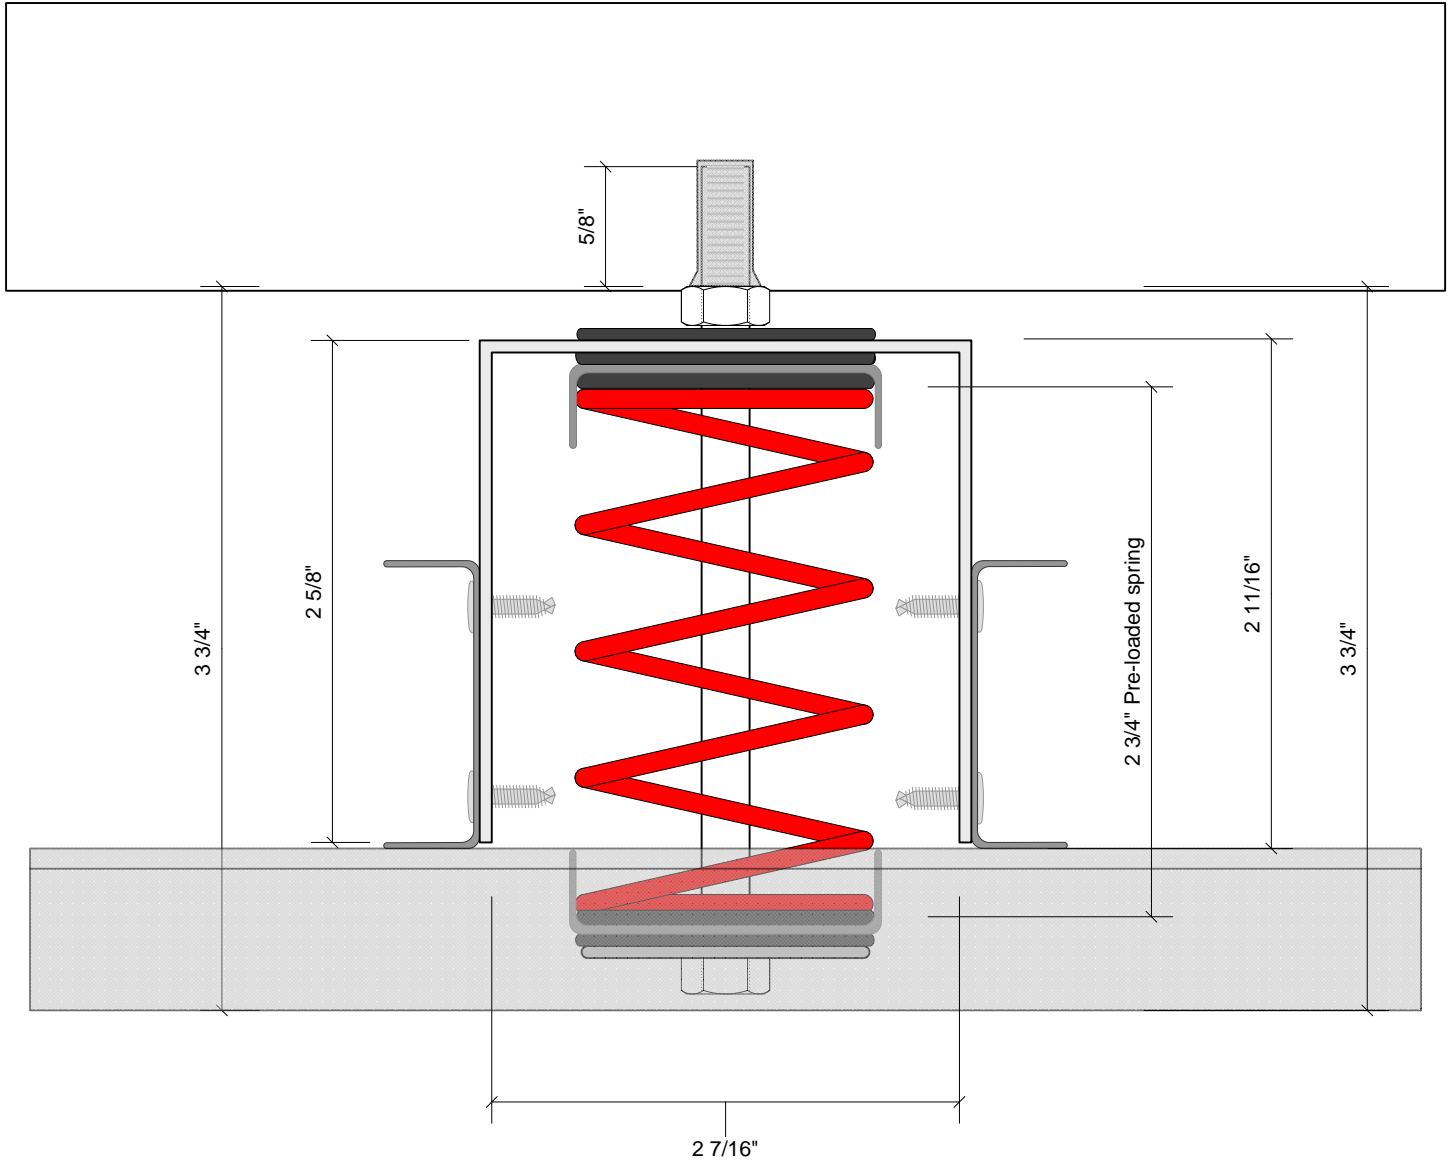


#### Material List:

- 1 Ea 4-1/4" x 1/4-20 Bolt with 3/4" threaded end.
- 1 Ea 1/4-20 Nut
- 2 Ea RSIC-SI Cup washers
- 2 Ea rubber bushings (current bushings used for RSIC-SI)
- 1 Ea rubber washer large hole (between cup washer at top and Bracket)
- 1 Ea Spring 5,10,20,30,40,60,80,120,160 pound/order Free height 3-1/4" (Same as current RSIC-SI Spring)
- 1 Ea Metal bracket 7-11/16" x 3" with 19mm hole in center (see additional drawings)

## RSIC-SI-CRCX2-LP

### RSIC Spring Isolator Cold Rolled Channel x2 Low Profile

Image below shows assembly with spring loaded with Gypsum board. Spring loaded height is 2-1/4"

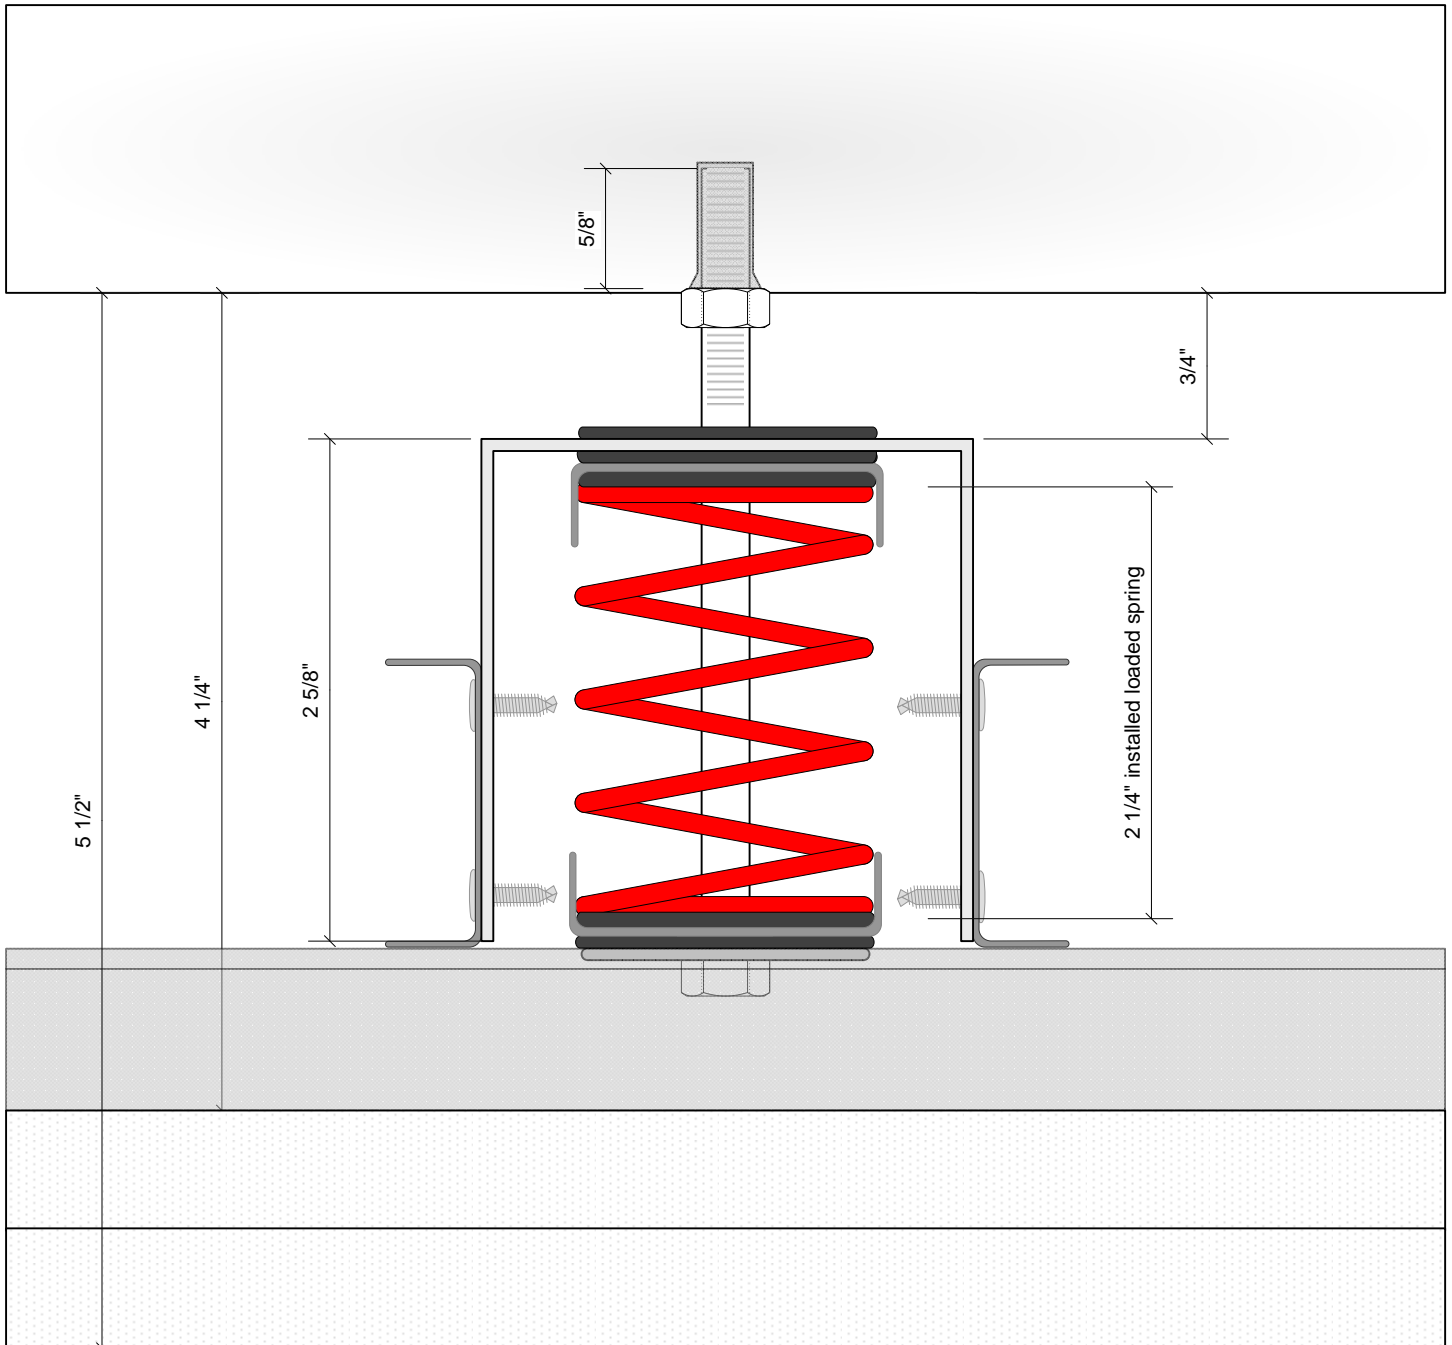

#### Material List:

- 1 Ea 4-1/4" x 1/4-20 Bolt with 3/4" threaded end.
- 1 Ea 1/4-20 Nut
- 2 Ea RSIC-SI Cup washers
- 2 Ea rubber bushings (current bushings used for RSIC-SI)
- 1 Ea rubber washer large hole (between cup washer at top and Bracket)
- 1 Ea Spring 5,10,20,30,40,60,80,120,160 pound/order Free height 3-1/4" (Same as current RSIC-SI Spring)
- 1 Ea Metal bracket 7-11/16" x 3" with 19mm hole in center (see additional drawings)